



bluesun

LED - brighter - cooler - longer

HEALTHY LED LIGHTING

2015-2016

SUN CORP INT'L, S.A.

En Jamaica W.I.: bluesun Jamaica Limited
email: info@bluesungoled.com
En Panamá : Lumens Blue Corp.
email: bluecorp@cableonda.net
Telf. 507-66912342

www.bluesungoled.com

PRODUCT
CATALOG



01-22

1 LED BULB



23-26

2 LED CANDLE BULB



27-32

3 LED TUBE



33-44

4 LED SPOTLIGHT



45-53

5 LED RECESSED LIGHT



54-63

6 LED DOWNLIGHT



64-66

7 LED CEILING LAMP



67-75

8 LED PANEL LIGHT



76-79

9 LED DESK LAMP

Light the future

ORCHID SERIES LED BULB




Material	PC+Al									
Lamp Holder	E27/B22									
Lifespan	15000 hours									
Voltage	100~264V									
Power ± 10%	3W	5W	7W	9W	12W					
PF	>0.5	>0.5	>0.9	>0.9	>0.9					
Ra	>80	>70	>80	>70	>80	>70	>80	>70	>80	>80
CCT	3000K	6500K	3000K	6500K	3000K	6500K	3000K	6500K	3000K	6500K
Luminous flux	240 lm	280 lm	420 lm	450 lm	600 lm	630 lm	760 lm	800 lm	950 lm	1000 lm
Power Equivalent Incandescent bulb	25W	40W	40W	40W	60W	75W				

3W

Product Size
50mm



180° Beam angle

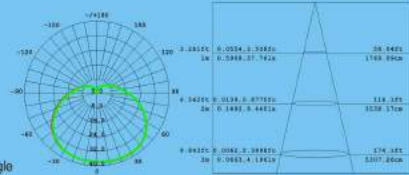

ORCHID SERIES LED BULB





5W

Product Size
55mm



180° Beam angle





7W

Product Size
60mm



220° Beam angle




9W

Product Size
60mm



220° Beam angle





12W

Product Size
72mm



230° Beam angle




Light the future






CARNATION SERIES LED BULB



Material	PC+Al									
Lamp Holder	E27/B22									
Lifespan	25000 hours									
Voltage	100-264V									
Power ±10%	3W	5W	7W	9W	12W					
PF	≥0.12	≥0.12	≥0.45	≥0.5	≥0.5					
Ra	>80	>70	>80	>70	>80	>70	>80	>70	>80	>70
CCT	2700K	6500K	2700K	6500K	2700K	6500K	2700K	6500K	2700K	6500K
Luminous flux	200 lm	240 lm	350 lm	400 lm	510 lm	560 lm	510 lm	560 lm	900 lm	960 lm
Power Equivalent Incandescent bulb	25W	40W	40W	60W	60W					

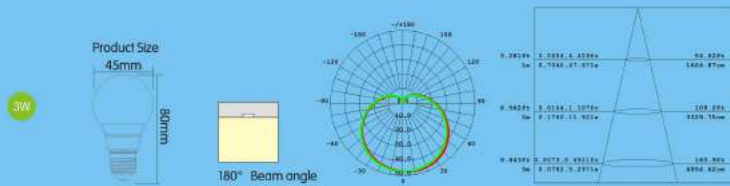


CARNATION SERIES LED BULB

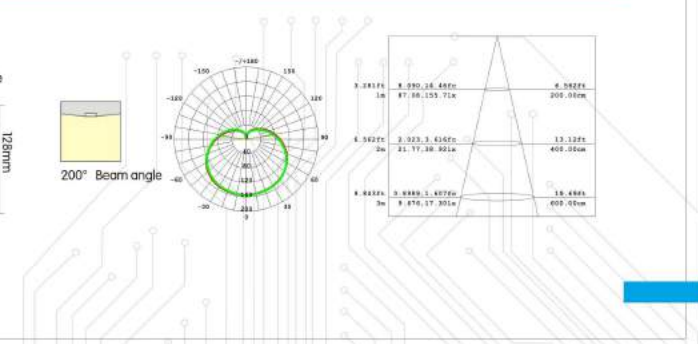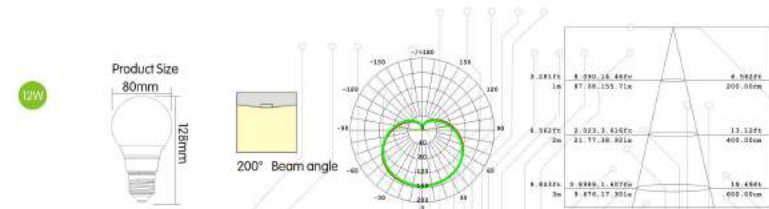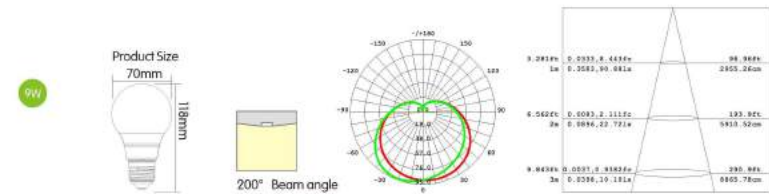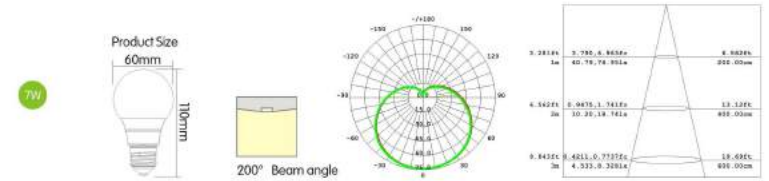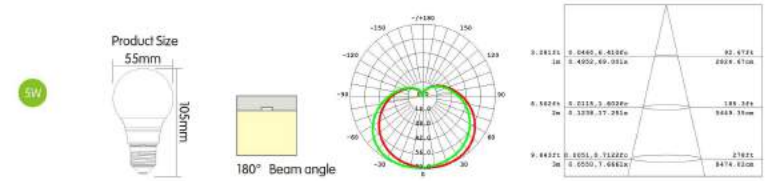


Light the future



DAISY SERIES LED BULB

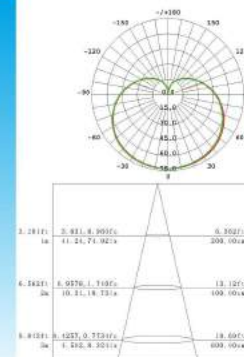

Material	PC			
Lamp Holder	E27/B22			
Lifespan	10000 hours			
Voltage	3W			
Power ±10%	100-264V	5W	7W	9W
PF	0.5	0.5	0.5	>0.9
Ra	>80 >80	>80 >80	>80 >80	>80 >80
CCT	3000K 6500K	3000K 6500K	3000K 6500K	3000K 6500K
Luminous flux	180 lm 190 lm	270 lm 280 lm	440 lm 460 lm	610 lm 640 lm
Power Equivalent Incandescent bulb	25W	40W	40W	60W

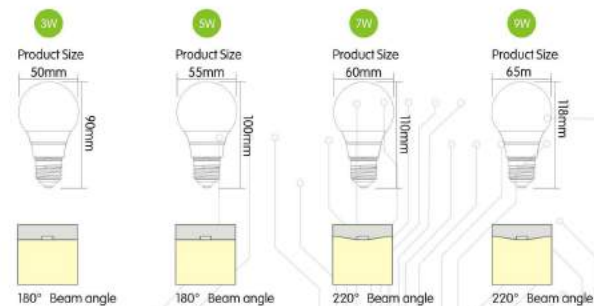


Light the future

HONEYSUCKLE SERIES LED BULB



Lamp Holder	E26/E27		E26/E27		E27	
Lifespan	20000 hours		20000 hours		20000 hours	
Wattage	4W		5W		7W	
Voltage	AC120/220 V		AC120/220 V		AC120/220 V	
PF	0.5		0.5		0.5	
Ra	80		80		80	
CCT	3000K	6000K	3000K	6000K	3000K	6000K
Luminous flux	400 lm	440 lm	600 lm	660 lm	840 lm	920 lm
Lumen Efficiency	100 lm/w		120 lm/w		120 lm/w	

Product Size



360° Beam angle



Light the future


SMART SERIES LED BULB



Control via Bluetooth

SPECIFICATION:

Color Temperature	RGB+Day light(5000k)+Warm White(2700k)
Rated Power	6.3W ± 0.5W/Day light/Warm White: 2W ± 0.3W(RGB)
Input Voltage	AC100-264V
Power Factor	> 0.5
Input Frequency	48hz-63hz
Lumen output	> 480lm
Luminous Efficiency	> 80lm/W
CRi	> 80
Lifespan	> 25000hours
Lamp Holder	E26/E27



LED CHIP DETAILS:

DL/WW LED Chips	3030/350mA/3.0V 8 sets
RGB chips	5050/60mA/R1.8V/G2.8V/B2.8V 8 sets

INSTRUCTIONS

- Put the bulb to be mounted to the lamp holder(E27/E26) and turn on the power supply;
- Install APK



APK-Smart

- Open the bluetooth in the system
- Open APP/APK and start the Smart Bulb



SMART SERIES LED BULB



Lamp Holder

Lifespan	25000 hours
Wattage	8W
Voltage	96-132 V/176-264V
PF	≥ 0.9
Ra	≥ 80
CCT	2700K 4000K 5000K
Luminous flux	630 lm 640 lm 660 lm
Power Equivalent Incandescent bulb	40W


E26

Lifespan	25000 hours
Wattage	10W
Voltage	96-132 V/176-264V
PF	≥ 0.9
Ra	≥ 80
CCT	2700K 4000K 5000K
Luminous flux	800 lm 830 lm 850 lm
Power Equivalent Incandescent bulb	60W






280° Beam angle

8W



10W



INDOOR LIGHTING

LED CANDLE BULB

Application:

For chandeliers, crystal light fittings, decorative lighting and general lighting.



Honeysuckle Series



Michelle Series



Michella Series



HONEYSUCKLE SERIES LED CANDLE BULB



Material	Glass+PBT
Lamp Holder	E12/E14
Lifespan	20000 hours
Power ± 10%	2W/3W
Voltage	120/220V
PF	>0.5
Ra	≥ 80
CCT	2700K/3000K/6000k
Luminous flux	200-240 lm
Power Equivalent Incandescent bulb	25W



Product Size



360° Beam angle



Material	Glass+PBT
Lamp Holder	E12/E14
Lifespan	20000 hours
Power ± 10%	2W/3W
Voltage	120/220V
PF	>0.5
Ra	≥ 80
CCT	2700K/3000K/6000k
Luminous flux	300-330 lm
Power Equivalent Incandescent bulb	30W



Product Size



220° Beam angle



Light the future


MICHELLE SERIES LED CANDLE BULB



Material	Ceramic+Glass	
Lamp Holder	E14	
Lifespan	25000 hours	
Power ±10%	3W	
Voltage	110/220V	
PF	>0.5	
Ra	≥80	≥70
CCT	3000K	5500K
Luminous flux	220lm ± 10%	240lm ± 10%
Power Equivalent Incandescent bulb	15W	




250° Beam angle

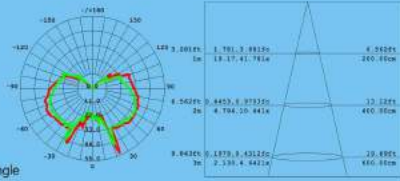

Material	Ceramic+Glass	
Lamp Holder	E14	
Lifespan	25000 hours	
Power ±10%	5W	
Voltage	176-264V	
PF	>0.5	
Ra	≥80	≥70
CCT	3000K	5500K
Luminous flux	380lm ± 10%	400lm ± 10%
Power Equivalent Incandescent bulb	25W	




250° Beam angle

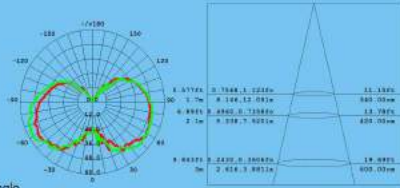

Material	Ceramic+Glass	
Lamp Holder	E14	
Lifespan	25000 hours	
Power ±10%	3W	
Voltage	110/220V	
PF	>0.5	
Ra	≥80	≥70
CCT	3000K	5500K
Luminous flux	220lm ± 10%	240lm ± 10%
Power Equivalent Incandescent bulb	15W	




250° Beam angle

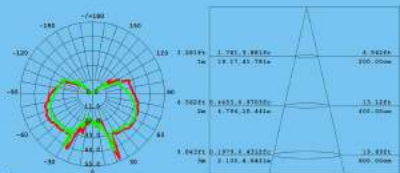

MICHELIA SERIES LED CANDLE BULB



Material	PC+Al	
Lamp Holder	E14	
Lifespan	15000 hours	
Power ±10%	3W	5W
Voltage	100-264V	
PF	>0.5	
Ra	≥80	
CCT	2700K/3000K	
Luminous flux	250lm	325lm
Power Equivalent Incandescent bulb	15W	




220° Beam angle



Material	PC+Al	
Lamp Holder	E14	
Lifespan	15000 hours	
Power ±10%	3W	5W
Voltage	100-264V	
PF	>0.5	
Ra	≥80	
CCT	2700K/3000K	
Luminous flux	250lm	325lm
Power Equivalent Incandescent bulb	15W	



220° Beam angle

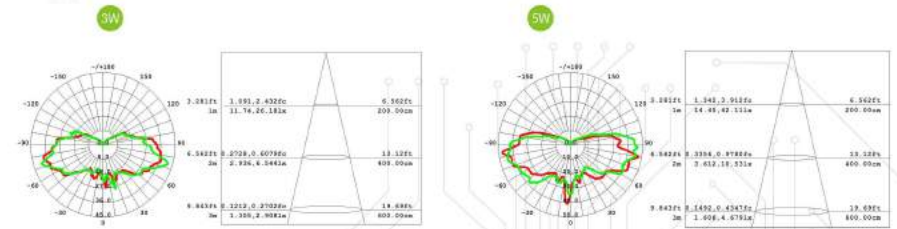

INDOOR LIGHTING

LED TUBE



Application:
Office, kitchen, warehouse,
car park, factory

SELECTIVELY AVAILABLE



Aurora Series Eos Series Surya Series Auge Series Selene Series




Aglala Series Diana Series Glory Series


Please contact us for more
information on products
available




AURORA SERIES T5 LED TUBE

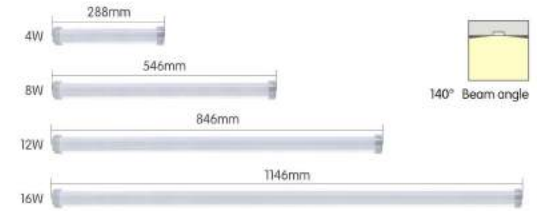


Material	PC			
Lifespan	15000 hours			
Voltage	96V-264V			
PF	≥ 0.5			
Ra	≥ 70			
Power	4W	8W	12W	16W
CCT	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
Luminous flux	280lm	720lm	1000lm	1400lm

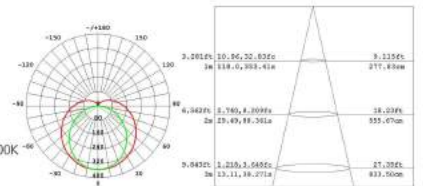

EOS SERIES T5 LED TUBE

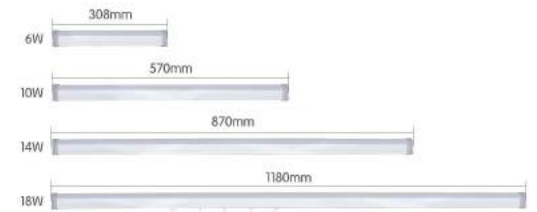


Material	PC&AL							
Lifespan	15000 hours							
Voltage	100V-264V							
PF	≥ 0.9							
Ra	≥ 70							
Power	6W	10W	14W	18W	6W	10W	14W	18W
CCT	3000K	6500K	3000K	6500K	3000K	6500K	3000K	6500K
Luminous flux	430lm	540lm	680lm	864lm	1020lm	1296lm	1300lm	1644lm

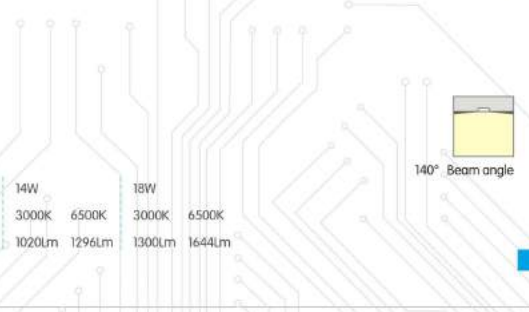


Light the future

SURYA SERIES

T5 LED TUBE

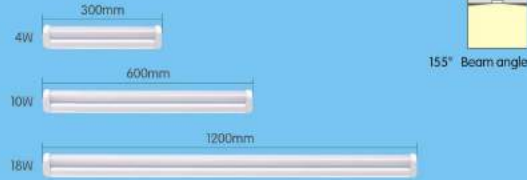


Material	PC							
Lifespan	15000 hours							
Voltage	100V-240V							
PF	≥0.5		≥0.9		≥0.9			
Power	4W	10W	18W					
Ra	≥70	≥80	≥70	≥80	≥70	≥80		
CCT	3000K	6500K	3000K	6500K	3000K	6500K		
Luminous flux	320lm	370lm	760lm	900lm	1440lm	1670lm		

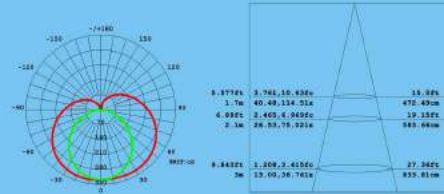


AUGE SERIES

T8 LED TUBE

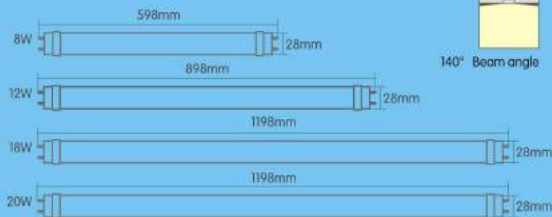

Material	Glass			
Lamp Holder	G13			
Lifespan	15000 hours			
Voltage	90-264V			
PF	≥0.9			
Ra	≥70			
Power	8W	12W	18W	20W
CCT	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
Luminous flux	≥800lm	≥1200lm	≥1650lm	≥1800lm

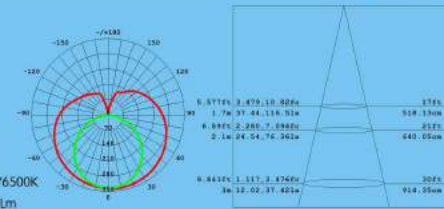

SELENE SERIES


T8 LED TUBE



Material	PC	PC
Lamp Holder	G13	G13
Lifespan	50000 hours	50000 hours
Power	10W	18W
Voltage	100-264V	100-264V
PF	≥0.9	≥0.9
Ra	>80	>80
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Color	Milky	Transparent
Luminous flux	1000 lm	1800 lm
		1900 lm

AGLAI A SERIES

T8 LED TUBE

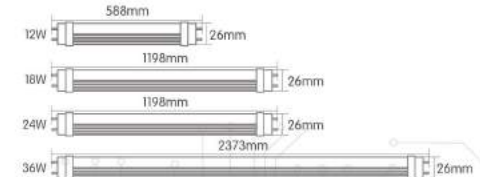


Material	PC+Al		PC+Al		PC+Al		PC+Al	
Lamp Holder	G13		G13		G13		G13	
Lifespan	5000 hours		5000 hours		5000 hours		5000 hours	
Voltage	100-264V		100-264V		100-264V		100-264V	
PF	≥0.9		≥0.9		≥0.9		≥0.9	
Ra	>80		>80		>80		>80	
Power	12W	18W	24W	36W	18W	24W	36W	36W
CCT	3000K	6500K	3000K	6500K	3000K	6500K	3000K	6500K
Luminous flux	1200 lm	1320 lm	1800 lm	1980 lm	2400 lm	2650 lm	3600 lm	3600 lm




Light the future



DIANA SERIES T8 LED TUBE

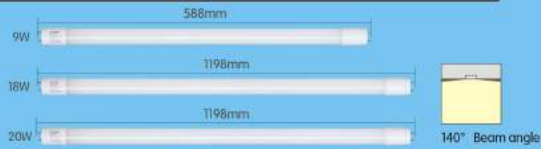


Material	PC					
Lamp Holder	G13					
Lifespan	15000 hours					
Voltage	100-264V					
PF	≥ 0.9					
Power	9W	18W	20W			
Ra	>80	>70	>80	>70	>80	>70
CCT	3000K	6500K	3000K	6500K	3000K	6500K
Luminous flux	660 lm	780 lm	1500 lm	1750 lm	1700 lm	2000 lm

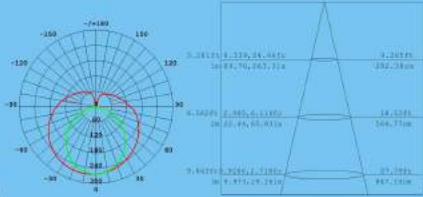

GLORY SERIES T8 LED TUBE

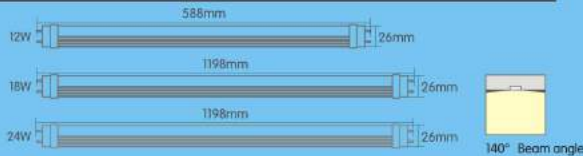

Material	PC&AL					
Lamp Holder	G13					
Lifespan	25000 hours					
Voltage	100-264V					
PF	≥ 0.9					
Power	12W	18W	24W			
Ra	>80	>70	>80	>70	>80	>70
CCT	3000K	6500K	3000K	6500K	3000K	6500K
Luminous flux	1020 lm	1200 lm	1620 lm	1900 lm	2040 lm	2400 lm

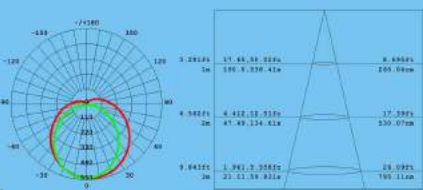

INDOOR LIGHTING

LED SPOTLIGHT



Application:
For accent and ambient lighting applications. Exclusive shop, hotel, restaurant, art gallery, museum, exhibition hall, home.

SELECTIVELY AVAILABLE



Popeye Series



Torch Series



Peral Series



Tiffany Series



Lucas Series



Vortex Series



Ajax Series



Sphirix Series



Juno Series


Please contact us for more information on products available



POPEYE SERIES PAR LED SPOTLIGHT



Material	PC	PC	PC	Aluminum
Lamp Holder	E27	E27	E27	E27
Dimmable	NO	NO	NO	NO
Lifespan	15000 hours	15000 hours	15000 hours	15000 hours
Power	20W	26W	33W	40W
Voltage	AC220V	AC220V	AC220V	AC220V
PF	> 0.95	> 0.95	> 0.95	> 0.95
Ra	> 80	> 80	> 80	> 80
CCT	3000K	3000K	3000K	3000K
Luminous flux	1400lm	1950lm	2200lm	3000lm



12° Beam angle




15° Beam angle



24° Beam angle



40° Beam angle

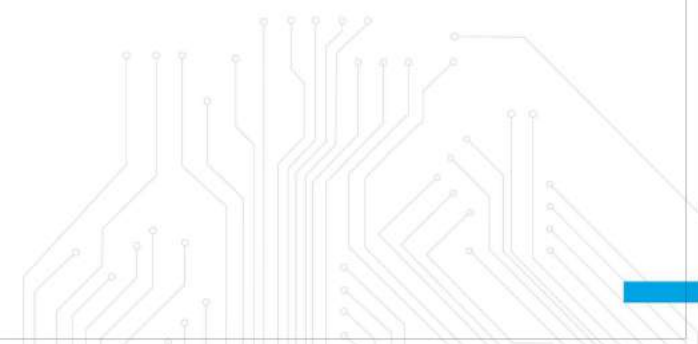


Light the future

TORCH SERIES LED PAR SPOTLIGHT





Material	Al	Al	Al	Al	Al
Lamp Holder	E26/E27	E26/E27	E26/E27	E26/E27	E26/E27
Dimmable	YES	YES	YES	YES	NO
Lifespan	35000 hours	35000 hours	35000 hours	35000 hours	35000 hours
Power	5W(PRA16)	8W(PRA20)	11W(PRA30)	20W(PRA38)	32W(PRA56)
Voltage	AC 120V/220V	AC 120V/220V	AC 120V/220V	AC 120V/220V	AC 120V/220V
PF	0.7	0.9	0.85	0.9	0.9
Ra	> 80	> 80	> 80	> 80	> 80
CCT	3000K 6500K	3000K 6000K	3000K 6500K	3000K 6500K	3000K 6500K
Luminous flux	280lm 330lm	430lm 520lm	830lm 840lm	1330lm 1460lm	2200lm 2600lm

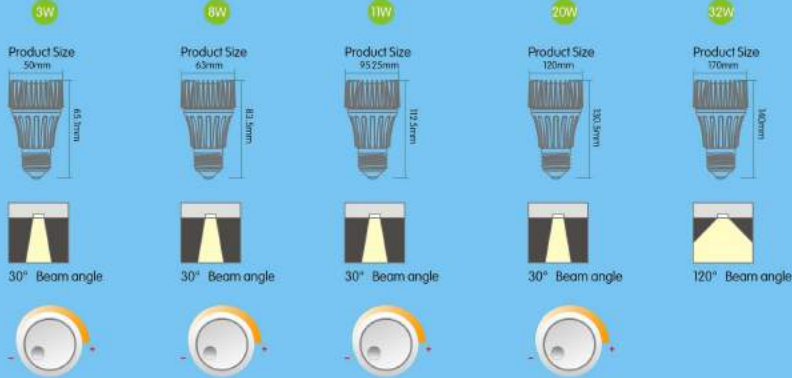

TORCH SERIES LED PAR SPOTLIGHT



Material	Al	Al
Lamp Holder	E26/E27	E26/E27
Dimmable	YES	YES
Lifespan	35000 hours	35000 hours
Power	11W(PRA30)	20W(PRA38)
Voltage	AC 120V/220V	AC 120V/220V
PF	0.9	0.9
Ra	> 80	> 80
CCT	3000K 6500K	3000K 6500K
Luminous flux	680lm 760lm	1370lm 1500lm

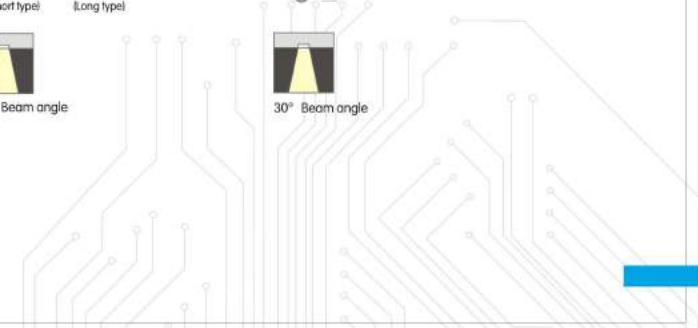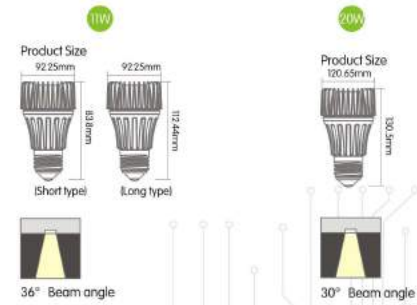

Light the future

PERAL SERIES LED SPOTLIGHT



Material	Al
Lamp Holder	GU10
Dimmable	YES
Lifespan	35000 hours
Power	5W
Voltage	AC 120V/220V
PF	0.7
Ra	> 80
CCT	3000K 6500K
Luminous flux	280lm 330lm





Material	Al
Lamp Holder	GU5.3
Dimmable	NO
Lifespan	35000 hours
Power	5W
Voltage	12V AC/DC & 10-30V DC optional
Ra	> 80
CCT	3000K 6500K
Luminous flux	290lm 340lm






TIFFANY SERIES LED SPOTLIGHT



Material	Ceramic
Lamp Holder	MR16 GU5.3
Lifespan	25000 hours
Power	3.5W
Voltage	12V AC/DC
Ra	> 80
CCT	2700K 3000K
Luminous flux	200lm 200lm

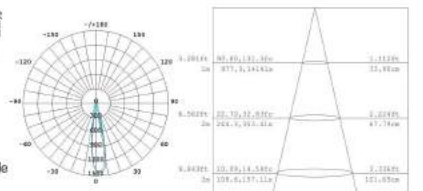


Material	Ceramic
Lamp Holder	MR16 GU10
Lifespan	25000 hours
Power	3.5W
Voltage	12V AC/DC
PF	> 0.5
Ra	> 80
CCT	2700K 3000K
Luminous flux	200lm 200lm

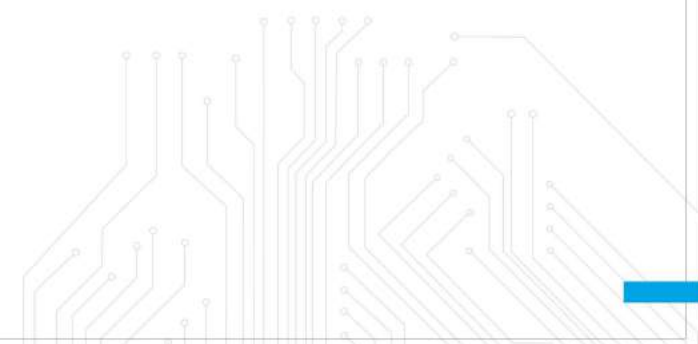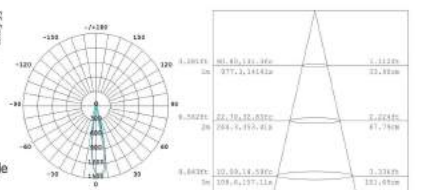

Light the future

LUCAS SERIES LED SPOTLIGHT



Material	Glass													CE
Lamp Holder	MR16	GU5.3												
Lifespan	15000 hours													
Voltage	12V													
PF	> 0.7													
Power	3W			5W			6W							
CCT	3000K	6000K	2700K	3000K	6000K	2700K	3000K	6000K	2700K					
Ra	> 80	> 75	> 80	> 80	> 75	> 80	> 80	> 75	> 80					
Luminous flux	230lm	230lm	220lm	350lm	350lm	340lm	400lm	400lm	390lm					
SCDM	< 6													



Material	Glass & Ceramic													CE
Lamp Holder	PAR16	GU10												
Lifespan	15000 hours													
Voltage	230V													
PF	> 0.4													
Power	3W			5W			6W							
CCT	3000K	6000K	2700K	3000K	6000K	2700K	3000K	6000K	2700K					
Ra	> 80	> 75	> 80	> 80	> 75	> 80	> 80	> 75	> 80					
Luminous flux	230lm	250lm	220lm	350lm	380lm	340lm	400lm	430lm	390lm					
SCDM	< 6													




Material	Glass													CE
Lamp Holder	PAR16	GU10												
Lifespan	15000 hours													
Voltage	220V													
PF	> 0.5													
Power	5W			6W			7W							
CCT	3000K	6000K	2700K	3000K	6000K	2700K	3000K	6000K	2700K					
Ra	> 80	> 75	> 80	> 80	> 75	> 80	> 80	> 75	> 80					
Luminous flux	350lm	380lm	340lm	400lm	430lm	390lm	550lm	580lm	540lm					
SCDM	< 6													








LUCAS SERIES LED SPOTLIGHT



Material	Glass													CE
Lamp Holder	PAR16	GU10												
Lifespan	15000 hours													
Voltage	85-265V													
PF	> 0.5													
Power	5W			6W			6W							
CCT	3000K	6000K	2700K	3000K	6000K	2700K	3000K	6000K	2700K					
Ra	> 80	> 75	> 80	> 80	> 75	> 80	> 80	> 75	> 80					
Luminous flux	350lm	380lm	340lm	400lm	430lm	390lm	400lm	430lm	490lm					
SCDM	< 6													



Material	Glass													CE
Lamp Holder	JR16	GX5.3												
Lifespan	15000 hours													
Voltage	220V													
Power	3W			5W			6W							
CCT	3000K	6000K		3000K	6000K		3000K	6000K						
Ra	> 80	> 75		> 80	> 75		> 80	> 75						
Luminous flux	230lm	250lm		350lm	380lm		400lm	430lm						
SCDM	< 6													

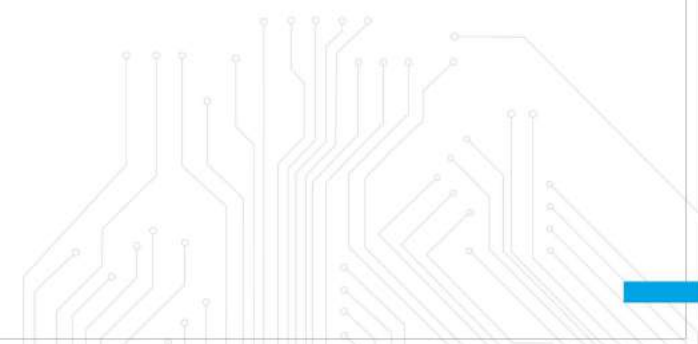

Light the future

VORTEX SERIES LED SPOTLIGHT



Material	Al & PC					
Lamp Holder	GU10					
Dimmable	NO					
Voltage	100-240V					
PF	> 0.45					
Ra	> 80					
Power	3W					
CCT	3000-3500K	4000-4500K	6000-6500K	3000-3500K	4000-4500K	6000-6500K
Luminous flux	180lm	200lm	220lm	280lm	300lm	340lm




Material	Al & PC					
Lamp Holder	GU5.3					
Dimmable	NO					
Ra	> 80					
Voltage	AC/DC 12V					
Power	3W					
CCT	3000-3500K	4000-4500K	6000-6500K	3000-3500K	4000-4500K	6000-6500K
Luminous flux	180lm	200lm	220lm	280lm	300lm	340lm




AJAX SERIES LED SPOTLIGHT




Material	Al & PC					
Lamp Holder	GU5.3					
Lifespan	15000 hours					
Dimmable	NO					
Voltage	AC/DC 12V					
Ra	> 80					
Power	3W					
CCT	3000K 6000K	3000K 6000K	3000K 6000K	3000K 6000K	3000K 6000K	3000K 6000K
Luminous flux	150lm	160lm	220lm	230lm	230lm	230lm

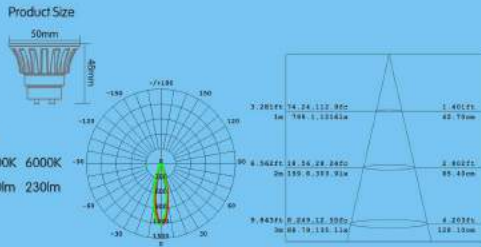

SPHINX SERIES LED BR LIGHT

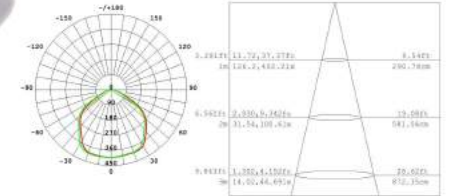

Material	Al & PC	
Lamp Holder	E26 (BR30)	E26(BR40)
Lifespan	25000 hours	
Dimmable	YES	
Voltage	96-132V	
PF	≥ 0.9	
Ra	> 80	
Power	10W	15W
CCT	2700K 5000K	2700K 5000K
Luminous flux	810lm 850lm	1100lm 1180lm

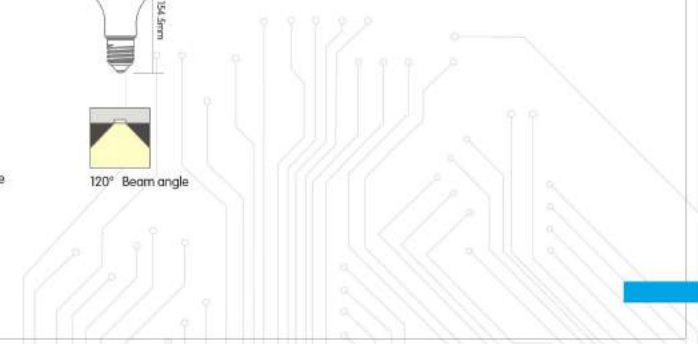

Light the future

JUNO SERIES AR111 LED SPOTLIGHT



Material	Al
Lamp Holder	G53
Lifespan	25000 hours
Dimmable	NO
Voltage	AC/DC 12V
Ra	80
Power	11W 15W
CCT	3000K 6000K 3000K 6000K
Luminous flux	750lm 930lm 910lm 1100lm



30° Beam angle



Material	Al
Lamp Holder	G53
Lifespan	25000 hours
Dimmable	NO
Voltage	AC/DC 12V
Ra	80
Power	11W 15W
CCT	3000K 6000K 3000K 6000K
Luminous flux	660lm 760lm 1000lm 1100lm



30° Beam angle



Material	Al
Lamp Holder	G53
Lifespan	25000 hours
Dimmable	NO
Voltage	AC/DC 12V
Ra	80
Power	11W 15W
CCT	3000K 6000K 3000K 6000K
Luminous flux	650lm 740lm 1000lm 1100lm



120° Beam angle



JUNO SERIES AR111 LED SPOTLIGHT



Material	Al
Lamp Holder	GU10
Lifespan	25000 hours
Dimmable	YES
Voltage	AC 120V/230V
Ra	80
Power	11W 15W
CCT	3000K 6000K 3000K 6000K
Luminous flux	760lm 680lm 970lm 990lm




30° Beam angle



Material	Al
Lamp Holder	GU10
Lifespan	25000 hours
Dimmable	YES
Voltage	AC 120V/230V
Ra	80
Power	11W 15W
CCT	3000K 6000K 3000K 6000K
Luminous flux	790lm 610lm 890lm 870lm



120° Beam angle

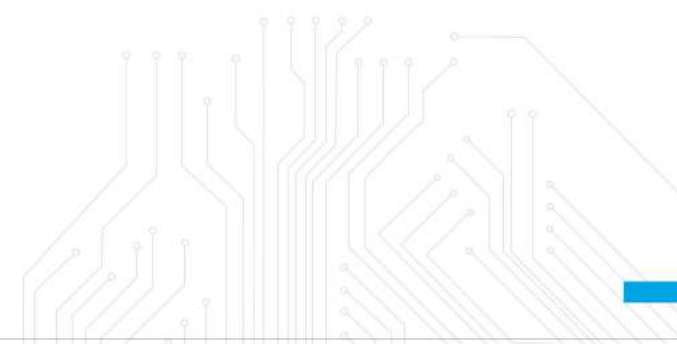

INDOOR LIGHTING

RECESSED LIGHT



Application :

Convention center, business center, office, hotel, museum, hospital, boutique, home and leisure space etc.



Cupid Series

Sati Series

Vulcan Series

Venus Series

Eros Series



Mala Series

Janus Series

CUPID SERIES RECESSED LIGHT



Material	PC&Al
Color	White
Light source	TSMC COB
Lifespan	25000 hours
Voltage	AC220-240V
PF	0.5
Power	3W
CCT	3000K 6000K
Luminous flux	90lm 100lm
Ra	>80 >70



Product Size(mm)

Cut-out Size(mm)



30° Beam angle



Light the future

SATI SERIES RECESSED LIGHT



Material	Die-casting aluminum		
Color	White		
Light source	Edison COB		
Lifespan	25000 hours		
Voltage	AC220-240V		
PF	≥0.5		
CCT	2700K/3000K/4000K/5000K		
Power	12W	22W	30W
Luminous flux	1103-1278Lm	1652-1858Lm	2170-2357Lm
Ra	>80		



12W	22W	30W
Product Size(mm)	Product Size(mm)	Product Size(mm)
φ120	φ145	φ170
Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)
φ105	φ130	φ150



VULCAN SERIES RECESSED LIGHT



Light source	COB		
Lifespan	25000 hours		30° Beam angle
Voltage	AC100-240V 50/60HZ		
Ra	≥70		
Power	3W ± 0.5W		Product Size(mm) Cut-out Size(mm)
CCT	6500k ± 500k	4000k ± 300k 3000k ± 200k	
Luminous flux	240 ± 30 Lm	240 ± 30 Lm 220 ± 30 Lm	
Power	4W ± 0.5W		Product Size(mm) Cut-out Size(mm)
CCT	6500k ± 500k	4000k ± 300k 3000k ± 200k	
Luminous flux	310 ± 30 Lm	310 ± 30 Lm 290 ± 30 Lm	
Power	5W ± 1W		Product Size(mm) Cut-out Size(mm)
CCT	6500k ± 500k	4000k ± 300k 3000k ± 200k	
Luminous flux	380 ± 30 Lm	380 ± 30 Lm 360 ± 30 Lm	
Power	7W ± 1W		Product Size(mm) Cut-out Size(mm)
CCT	6500k ± 500k	4000k ± 300k 3000k ± 200k	
Luminous flux	580 ± 50 Lm	580 ± 50 Lm 550 ± 50 Lm	
Power	9W ± 1W		Product Size(mm) Cut-out Size(mm)
CCT	6500k ± 500k	4000k ± 300k 3000k ± 200k	
Luminous flux	750 ± 100 Lm	750 ± 100 Lm 720 ± 100 Lm	

Light the future

VENUS SERIES RECESSED LIGHT



Material: PC&Al
 Light source: COB
 Color: White
 Lifespan: 25000 hours
 Voltage: AC100-240V 50/60HZ
 Ra: ≥ 80

Power: 3W
 CCT: 6500k, 4000k, 3000k
 Luminous flux: 270 \pm 30 Lm, 255 \pm 30 Lm, 240 \pm 30 Lm
 PF: ≥ 0.5



Power: 3W
 CCT: 6500k, 4000k, 3000k
 Luminous flux: 250 \pm 30 Lm, 235 \pm 30 Lm, 220 \pm 30 Lm
 PF: ≥ 0.5



Power: 5W
 CCT: 6500k, 4000k, 3000k
 Luminous flux: 380 \pm 30 Lm, 350 \pm 30 Lm, 330 \pm 30 Lm
 PF: ≥ 0.5



VENUS SERIES RECESSED LIGHT




Power: 7W
 CCT: 6500k, 4000k, 3000k
 Luminous flux: 560 \pm 50 Lm, 530 \pm 50 Lm, 500 \pm 50 Lm
 PF: ≥ 0.7




Power: 9W
 CCT: 6500k, 4000k, 3000k
 Luminous flux: 730 \pm 50 Lm, 690 \pm 50 Lm, 660 \pm 50 Lm
 PF: ≥ 0.7



Power: 12W
 CCT: 6500k, 4000k, 3000k
 Luminous flux: 1080 \pm 100 Lm, 1020 \pm 100 Lm, 980 \pm 100 Lm
 PF: ≥ 0.7



Power: 15W
 CCT: 6500k, 4000k, 3000k
 Luminous flux: 1250 \pm 150 Lm, 1220 \pm 150 Lm, 1150 \pm 150 Lm
 PF: ≥ 0.9



Light the future

EROS SERIES RECESSED LIGHT



Material	Die-casting aluminum			
Light source	Edison COB/Citizen COB			
Lifespan	25000 hours			
Voltage	AC100-240V			
Ra	≥ 80			
PF	≥ 0.5			
CCT (K)	2700K/3000K/4000K/5000K			
Power (w)	12W	22W	30W	45W
Luminous flux	438-468lm	1383-1489lm	1652-1858lm	2170-2357lm



50° Beam angle

Power (W)	Product Size (mm)	Cut-out Size (mm)
12W	Product Size (mm) Φ105	Cut-out Size (mm) Φ90
22W	Product Size (mm) Φ140	Cut-out Size (mm) Φ125
30W	Product Size (mm) Φ205	Cut-out Size (mm) Φ185
45W	Product Size (mm) Φ240	Cut-out Size (mm) Φ215



MAIA SERIES RECESSED LIGHT



Material	Die-casting aluminum		
Light source	SANAN COB		
Lifespan	30000 hours		
Voltage	185-265V		
Ra	≥ 80		
PF	≥ 0.5		
CCT (K)	3000K-6000K		
Power (w)	7W	9W	15W
Luminous flux	800lm	900lm	1500lm



30° Beam angle

Power (W)	Product Size (mm)	Cut-out Size (mm)
7W	Product Size (mm) Φ85	Cut-out Size (mm) Φ75
9W	Product Size (mm) Φ108	Cut-out Size (mm) Φ95
15W	Product Size (mm) Φ136	Cut-out Size (mm) Φ120



Light the future


JANUS SERIES RECESSED LIGHT



Material: PC&Al
 Light source: SANAN COB
 Lifespan: 30000 hours
 Voltage: AC 176-264V
 Ra: 80
 PF: 0.5
 Power: 1 x 6W
 CCT: 3000K-5000K
 Luminous flux: 420lm-450lm



30° Beam angle




Product Size(mm)



Cut-out Size(mm)


75



Material: PC&Al
 Light source: SANAN COB
 Lifespan: 30000 hours
 Voltage: AC 176-264V
 Ra: 80
 PF: 0.5
 Power: 2 x 6W
 CCT: 3000K-5000K
 Luminous flux: 840lm-900lm




30° Beam angle



Product Size(mm)

Cut-out Size(mm)

155mm*75mm

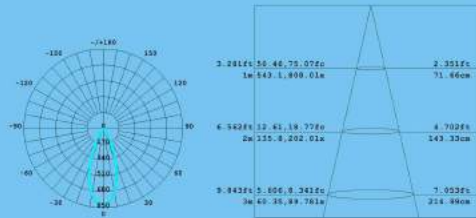

INDOOR LIGHTING

LED DOWNLIGHT



Application:
 Shopping mall, hotel, office,
 museum, exhibition hall,
 conference room and home
 etc.



Anatole Series



Mesembria Series



Silver Moon Series



New Moon Series



Crescent Moon Series



Bright Moon Series



Ufo Series



Full Moon Series



Dysis Series

Light the future

SILVER MOON SERIES LED DOWNLIGHT



Material	Al & PC											
Color	Silver											
Light source	S730											
Lifespan	30000 hours											
Voltage	AC176-264V											
Ra	≥ 80											
PF	PF0.5											
Power	4W	6W		8W		12W		15W		18W		
CCT	3000K	5000K	3000K	5000K	3000K	5000K	3000K	5000K	3000K	5000K	3000K	5000K
Luminous flux	300 Lm	310 Lm	380Lm	400 Lm	590Lm	610Lm	950Lm	980 Lm	1060 Lm	1100Lm	1300Lm	1350Lm



110° Beam angle



NEW MOON SERIES LED DOWNLIGHT




Material	Al & PC
Color	White
Light source	SANAN S730
Lifespan	25000 hours
Voltage	AC100-240V 50/60HZ
Ra	≥ 80



105° Beam angle

PF	≥ 0.5	≥ 0.5	≥ 0.5
Power	3W	5W	7W
CCT	5000K/6000K	3000K	5000K/6000K
Luminous flux	180 ± 30 Lm	170 ± 30 Lm	320 ± 30 Lm
Power	9W	14W	18W
CCT	5000K/6000K	3000K	5000K/6000K
Luminous flux	560 ± 50 Lm	540 ± 50 Lm	1200 ± 100 Lm

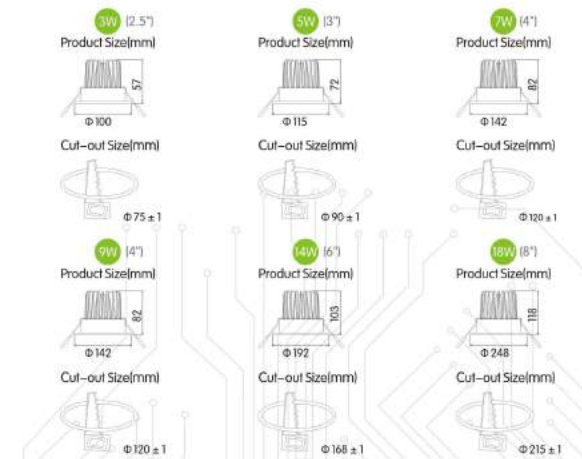

Light the future

CRESCENT MOON SERIES LED DOWNLIGHT



Material	Al & PC				
Color	White				
Light source	2835				
Lifespan	30000 hours				
Voltage	AC100-240V				
PF	≥ 0.9				
Ra	≥ 70				
Power	5W	8W	10W	12W	15W
CCT	6000K	6000K	6000K	6000K	6000K
Luminous flux	425Lm	680Lm	850Lm	1020Lm	1190Lm



180° Beam angle

Power	Product Size(mm)	Cut-out Size(mm)
5W (2.5")	Product Size(mm): 66 Cut-out Size(mm): φ80	
8W (3")	Product Size(mm): 84 Cut-out Size(mm): φ100	
10W (4")	Product Size(mm): 94 Cut-out Size(mm): φ120	
12W (5")	Product Size(mm): 97 Cut-out Size(mm): φ150	
15W (6")	Product Size(mm): 97 Cut-out Size(mm): φ175	



BRIGHT MOON SERIES LED DOWNLIGHT



Material	Al & PC					
Color	White					
Light source	2835					
Voltage	AC100-240V 50/60HZ					
PF	≥ 0.9					
Ra	≥ 80					
Power	9W	14W	18W	3000K	3000K	3000K
CCT	6000K	3000K	6000K	6000K	6000K	6000K
Luminous flux	750 ± 100 Lm	680 ± 100 Lm	1100 ± 100 Lm	1000 ± 100 Lm	1500 ± 150 Lm	1400 ± 150 Lm



110° Beam angle

Power	Product Size(mm)	Cut-out Size(mm)
9W (4")	Product Size(mm): 70 Cut-out Size(mm): φ125	
14W (4")	Product Size(mm): 70 Cut-out Size(mm): L125	
18W (6")	Product Size(mm): 87 Cut-out Size(mm): φ165	
18W (6")	Product Size(mm): 87 Cut-out Size(mm): L165	
18W (8")	Product Size(mm): 102 Cut-out Size(mm): φ215	
18W (8")	Product Size(mm): 102 Cut-out Size(mm): L215	











Light the future

UFO SERIES LED DOWNLIGHT



Material	Al & PC									
Color	White									
Light source	SANAN 5730									
Lifespan	30000 hours									
Voltage(V)	185-265V									
PF	≥ 0.5									
Ra	80									
Power	3W	5W		6W		8W		10W		
CCT	3000K	5000K	3000K	5000K	3000K	5000K	3000K	5000K	3000K	5000K
Luminous flux	190 Lm	210 Lm	300 Lm	340 Lm	400 Lm	430 Lm	490 Lm	525 Lm	600 Lm	630 Lm



3W (2")	5W (2.5")	6W (3")	8W (3.5")	10W (4")
Product Size(mm)	Product Size(mm)	Product Size(mm)	Product Size(mm)	Product Size(mm)
				
φ88	φ107	φ117	φ127	φ147
Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)
				
φ75	φ85	φ95	φ105	φ125















FULL MOON SERIES LED DOWNLIGHT



Material	Al & PC						
Color	White/Chrome/Silver						
Lifespan	25000 hours						
Light source	SANAN 5730						
Voltage	176-264V						
Ra	70						
PF	>0.5						
CCT	6500/3000K						
Power	3W	5W	7W	9W	12W	18W	
Luminous flux	195Lm	325Lm	455Lm	585Lm	780Lm	1170Lm	



3W (2")	5W (2.5")	7W (2.5")	9W (4")
Product Size(mm)	Product Size(mm)	Product Size(mm)	Product Size(mm)
			
φ95	φ105	φ105	φ140
Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)
			
φ75	φ85	φ85	φ115
12W (4")	18W (6")		
Product Size(mm)	Product Size(mm)		
			
φ140	φ190		
Cut-out Size(mm)	Cut-out Size(mm)		
			
φ115	φ170		

Light the future


DYSIS SERIES LED DOWNLIGHT




Material	Al & PC					
Color	White					
Light source	2835					
Lifespan	35000 hours					
Voltage	96-132V					
PF	>0.9					
Ra	>80					
Power	10W	13W	18W	10W	13W	18W
CCT	3000K 5000K	3000K 5000K	3000K 5000K	3000K 5000K	3000K 5000K	3000K 5000K
Luminous flux	585Lm 590Lm	845Lm 850Lm	1170Lm 1180Lm	585Lm 590Lm	845Lm 850Lm	1170Lm 1180Lm




10W (4")
Product Size(mm)

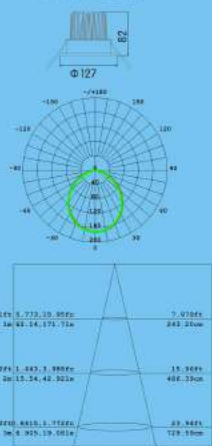

13W (6")
Product Size(mm)

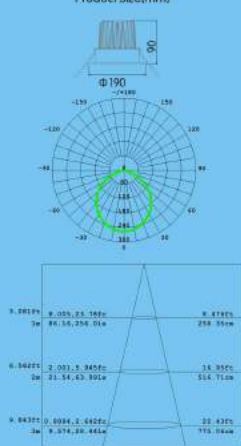

18W (6")
Product Size(mm)

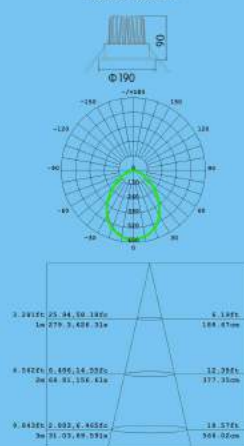

INDOOR LIGHTING

LED CEILING LAMP



Application:
Bedroom, living room,
kitchen, corridor.



Graces Series



Asteria Series



Luna Series



Admire Series

Light the future

GRACES SERIES LED CEILING LAMP



Material PMMA
Voltage 220V
Ra 80
Power 12W/16W/22W
CCT 3000K
luminous efficacy 70lm/W



ASTERIA SERIES LED CEILING LAMP






Material PMMA
Voltage AC176-264V
Ra 80
Power 12W/18W/24W
CCT 3000K/5000K/6000K
luminous efficacy 70lm/W
Control Infrared sensing/Sound control



LUNA SERIES LED CEILING LAMP



Material PMMA
Ra 80
luminous efficacy 70lm/W
Power 18W 24W 40W
Voltage 220V 220V AC176-264V
CCT 5000K 5000K 3000K/4000K/6000K (Dimmable)

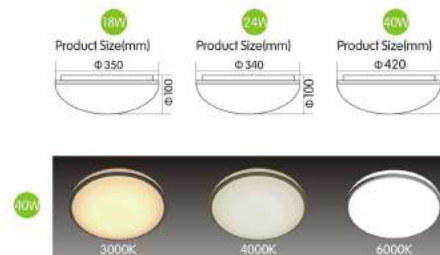

ADMIRE SERIES LED CEILING LAMP



Material PMMA
Voltage AC176-264V
Ra 80
Power 24W
CCT 3000K/4500K/6000K/ Night light mode(Dimmable)
luminous efficacy 70lm/W



INDOOR LIGHTING

LED PANEL LIGHT



Application :
Shopping mall, office,
conference room, museum,
exhibition hall, hospital.



Kira Series

Karida Series

Blanche Series

Thoth Series















Hemera Series



KIRA SERIES LED PANEL LIGHT




Voltage	AC90-265V								120° Beam angle
PF	0.9								
Ra	80								
CCT	3000K/4500K/6500K								
Power	3W	4W	6W	9W	12W	15W	18W		
Luminous flux	165lm	220lm	340lm	580lm	950lm	1120lm	1350lm		

3W	4W	6W	9W
Product Size(mm)	Product Size(mm)	Product Size(mm)	Product Size(mm)
 25	 25	 25	 25
Product Size(mm)	Product Size(mm)	Product Size(mm)	Product Size(mm)
Φ 90	Φ 106	Φ 126	Φ 146
Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)
 75	 96	 105	 136
Product Size(mm)	Product Size(mm)	Product Size(mm)	
 25	 25	 25	
Product Size(mm)	Product Size(mm)	Product Size(mm)	
Φ 178	Φ 190	Φ 225	
Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)	
 160	 180	 210	

Light the future

KIRA SERIES LED PANEL LIGHT

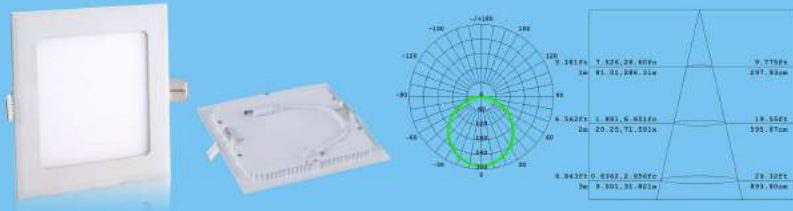

Voltage	AC90-265V						
PF	0.9						
Ra	80						
CCT	3000K/4500K/6500K						
Power	3W	4W	6W	9W	12W	15W	18W
Luminous flux	165lm	220lm	340lm	580lm	950lm	1120lm	1350lm



120° Beam angle

3W	4W	6W	9W
Product Size(mm)	Product Size(mm)	Product Size(mm)	Product Size(mm)
 L 90	 L 106	 L 126	 L 146
Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)
 L 72	 L 96	 L 105	 L 136
12W	15W	18W	
Product Size(mm)	Product Size(mm)	Product Size(mm)	
 L 176	 L 190	 L 225	
Cut-out Size(mm)	Cut-out Size(mm)	Cut-out Size(mm)	
 L 160	 L 180	 L 210	



KARIDA SERIES LED PANEL LIGHT



Voltage	AC90-265V		
PF	0.9		
Ra	80		
CCT	3000K/4500K/6500K		
Power	6W	12W	18W
Luminous flux	360lm	900lm	1280lm



120° Beam angle

6W	12W	18W
Product Size(mm)	Product Size(mm)	Product Size(mm)
 Ø 120	 Ø 172	 Ø 225




Voltage	AC90-265V		
PF	0.9		
Ra	80		
CCT	3000K/4500K/6500K		
Power	6W	12W	18W
Luminous flux	360lm	900lm	1280lm



120° Beam angle

6W	12W	18W
Product Size(mm)	Product Size(mm)	Product Size(mm)
 L 120	 L 172	 L 225

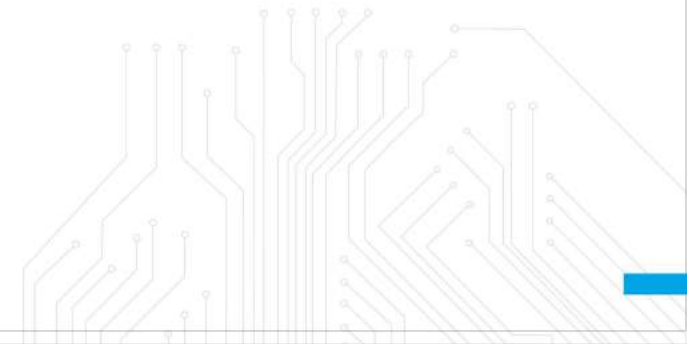

Light the future

BLANCHE SERIES LED PANEL LIGHT



POWER FIRST: White light



POWER SECND: Blue light



POWER THIRD: White light & Blue light

FACE RING:

Using national standard 12# environmental aluminum, whole die-casting. More durable, environmental, strength and ductile than ordinary aluminum.

DIFFUSER PLATE:

PS material form Japan Mitsubishi is used. The 1.5mm ultrathin diffuser plate has a light transmittance of up to 92%, and its even and gentle light diffusion can effectively reduce fatigue and create the healthy light environment.

LIGHT GUIDER:

using Mitsubishi material, thickness 4mm, with high precision laser dot, make the light even and comfortable, no dark space, can effectively protect the eyes.

REFLECT PAPER:

Same as Hp LCD TV backlight reflective paper, strong reflective performance, thickness 0.25mm-0.5mm.

ACRYLIC FACE RING:

It has the transparency as crystal, with light transmittance of over 96%.

REAR COVER:

The rear cover is made of 0.8mm thick iron, with two spraying processes of matte white and fine sand white; the spraying is uniform and the overall texture is exceptional.

DRIVER:

Low-voltage constant-current intelligent IC driver is used, which is of integrated design and made of the imported PC material, with dust prevention, compression resistance and high temperature resistance. Ambient temperature for working: -20°C-85°C.

POWER LINE:

Silica gel is used externally, and it has the joint lock ring design which is easy for installation and disassembly. Pure copper core line is used internally, which has a small resistance, with resistance to bend, flame retardancy, and resistance to high temperature and aging.

CLIPS AND SILICONE CASE:


Clips is made of the superior stainless steel, with strong elasticity, accurate bending angle and corrosion resistance, which is ont essy to damage and is high in use security. Silica gel is adopted for jump ring jacket.




BLANCHE SERIES LED PANEL LIGHT



Voltage	AC90-265V		
PF	0.9		
Ra	70		
CCT	3000K+blue/4000K+blue/6500K+blue		
Power	3+1W	6+1W	12+1W
Luminous flux	165lm	395lm	900lm

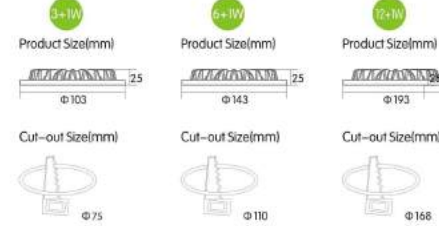


Voltage	AC90-265V		
PF	0.9		
Ra	70		
CCT	3000K+blue/4000K+blue/6500K+blue		
Power	3+1W	6+1W	12+1W
Luminous flux	165lm	395lm	900lm

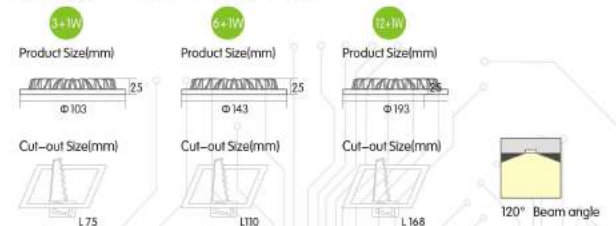

Light the future

HEMERA SERIES LED PANEL LIGHT

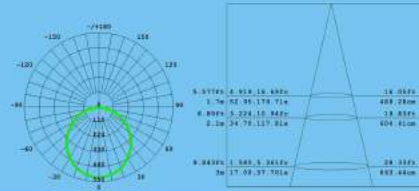

Installation	Recessed/Ceiling/Pendent				
Material	PMMA & Al				
Color	Silver				
Lifespan	30000 hours				
Voltage	AC110-240V				
Ra	70				
CCT	3000K-6000K				
Power	14W	24W	40W	40W	65W
PF	0.4	0.4	0.94	0.94	0.9
Light source	SANAN 4014	SANAN 4014	SANAN 3020	SANAN 3020	SANAN 4014
Luminous flux	850lm	1600lm	3000lm	2600lm	4500lm
Product Size	300mm*300mm	300mm*600mm	595mm*595mm	300mm*1200mm	600mm*1200mm
Cut-out Size	280mm*280mm	280mm*580mm	575mm*575mm	280mm*1180mm	580mm*1180mm



INDOOR LIGHTING

LED DESK LAMP



Application:
Office, library, living room,
bedroom



HL-1308



HL-1309



HL-15586



HL-13301



HL-13101



HL-1306B



HL-1306H



CNLA0301




HL-1315



HL-1312

Light the future

LED TABLE LAMP

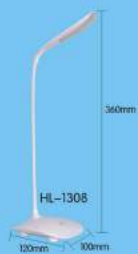

Model No.	HL-1308
Color	White
Voltage	12V
Wattage	2W
CCT	5000-6500K
CRI(Ra)	70
Material	ABS
Wire Length	1.2m



DIMMABLE TOUCH SWITCH
3-level adjustable brightness



Free twisted silicone tube




Antiskid base



RECHARGEABLE BATTERIES INSIDE
Keep working without power supply

POWER SUPPLY

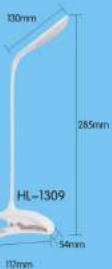

Model No.	HL-1309
Color	White
Voltage	220V
Wattage	2W
CCT	5000-6500K
CRI(Ra)	80
Material	ABS
Wire Length	1.2m



DIMMABLE TOUCH SWITCH
3-level adjustable brightness



ABS Plastic



Frosted acrylic light guide plate brings soft and comfortable light



Model No.	HL-15586
Color	White
Voltage	10V
Wattage	7W
CCT	5000-6300K
CRI(Ra)	70
Material	ABS,Rubber
Wire Length	1.5m



LED TABLE LAMP



Model No.	HL-13301
Color	Silver
Voltage	220V
Wattage	7W
CCT	5000K
CRI(Ra)	70
Material	ABS & Aluminum
Wire Length	1.5m



FROSTED ACRYLIC LIGHT GUIDE PLATE
Side emitting technology brings soft and comfortable light



DIMMABLE TOUCH SWITCH
6-level adjustable brightness



Model No.	HL-13101
Color	Silver
Voltage	220V
Wattage	9W
CCT	5000K
CRI(Ra)	70
Material	ABS
Wire Length	1.2-1.5m



INNOVATIVE RING LIGHT DESIGN
• Larger lighting coverage
• Light is more soft and uniform



DIMMABLE TOUCH SWITCH
4-level adjustable brightness
(0-10%-50%-100%)



EFFICIENT HEAT DISSIPATION TECHNOLOGY
• High-density heat emission hole
• Safe and durable



Color	White/Black
Voltage	220V
Wattage	5W
CCT	3000-6000K
CRI(Ra)	80
Material	ABS,Rubber
Wire Length	1.5m



DIMMABLE TOUCH SWITCH
3-level adjustable brightness



Free twisted silicone tube



RECHARGEABLE BATTERIES INSIDE
Keep working without power supply